


Non Insulated Butt Connectors



Part N°	Wire section mm ²	AWG/MCM	Dimensions mm.			Material width mm	Treatment	
			L	ØD	Ød			
B-0.5	0.25-0.75	22-18	11.5	2.6	1.4	copper 0.4	Sn	1.000
B-125	0.25-1.65	22-16	15.0	3.3	1.7	copper 0.8	Sn	1.000
B-2	1.04-2.63	16-14	15.0	4.1	2.3	copper 0.8	Sn	1.000
B-5.5	2.63-6.64	12-10	15.0	5.4	3.4	copper 1.0	Sn	1.000
B-8	6.64-10.52	8	21.0	7.0	4.5	copper 1.2	Sn	100
B-14	10.52-16.78	6	26.0	8.9	5.8	copper 1.5	Sn	100
B-22	16.78-26.66	4	29.0	11.3	7.7	copper 1.75	Sn	100
B-38	26.66-42.42	2	32.0	13.2	9.4	copper 1.85	Sn	100
B-60	42.42-60.57	1/0	36.0	15.3	11.4	copper 1.95	Sn	50
B-70	60.57-76.28	2/0	36.0	17.5	13.3	copper 2.1	Sn	50
B-80	76.28-96.3	3/0	38.0	19.5	14.5	copper 2.5	Sn	50
B-100	96.3-117.2	4/0	38.0	22.1	16.4	copper 2.85	Sn	20
B-150	117.2-152.05	MCM-250-300	54.0	26.4	19.5	copper 3.45	Sn	20
B-180	152.05-192.6	MCM-300-350	55.0	28.5	21.0	copper 3.75	Sn	10
B-200	192.6-242.27	MCM-400	63.0	32.4	24.0	copper 4.20	Sn	10
B-325	242.27-325	MCM-500-600	72.0	37.0	28.0	copper 4.50	Sn	5

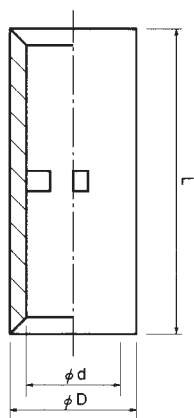