





Terminales



Material: Cobre
Acabado: Estañado

Ref.	Sección cable mm ² / AWG	Dimensiones mm.				Ref.	Sección cable mm ² / AWG	Dimensiones mm.			
		Ød2	B	L				Ød2	B	L	
R-0.5-2	0,5	2,2	5,2	12,4	1.000	R-2-3M	2	3,2	6,6	14,4	1.000
R-0.5-3	0,2-0,5	3,2	5,2	12,4		R-2-3	1,04-2,63	3,2	8,5	16,8	
R-0.5-3.5	22-20	3,7	6,6	15,0		R-2-3.5	16-14	3,7	6,6	14,4	
R-0.5-4		4,3	6,6	15,0		R-2-3.5L		3,7	8,5	16,8	
R-0.5-5		5,3	8,0	15,0		R-2-4M		4,3	6,6	14,4	
R-1.25-3	1,25	3,2	5,5	11,5	1.000	R-2-4		4,3	8,5	16,8	
R-1.25-3.5	0,25-1,65	3,7	5,5	11,5		R-2-5M		5,3	8,5	16,8	
R-1.25-3.5M	22-16	3,7	6,6	14,4		R-2-5		5,3	9,5	16,7	
R-1.25-4M		4,3	6,6	14,4		R-2-6		6,4	12,0	21,8	
R-1.25-4		4,3	8,0	15,8		R-2-8		8,4	12,0	21,8	
R-1.25-5		5,3	8,0	15,8		R-2-10		10,5	13,6	25,5	
R-1.25-6		6,4	11,6	21,5		R-3.5-4	3,5	4,3	9,5	20,0	1.000
R-1.25-8		8,4	11,6	21,5		R-3.5-5	2,63-4,6	5,3	9,5	20,0	
R-1.25-10		10,5	13,7	25,5			12				

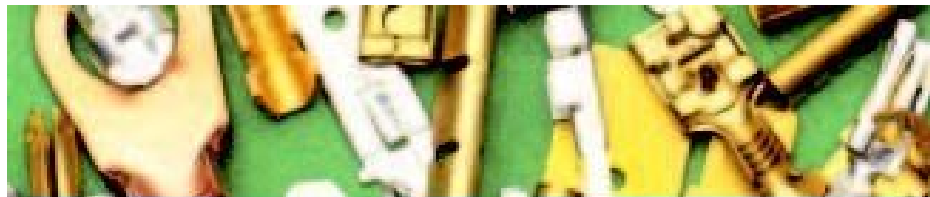

Terminales



Ref.	Sección cable mm ² / AWG	Dimensiones mm.				Ref.	Sección cable mm ² / AWG	Dimensiones mm.			
		Ød2	B	L				Ød2	B	L	
R-5.5-3	5,5	3,2	9,5	19,5	1.000	R-22-10		10,5	17,5	36,5	100
R-5.5-3.5	2,63-6,64	3,7	9,5	19,5		R-22-12		13,0	22,0	42,5	
R-5.5-4	12-10	4,3	9,5	19,5		R-22-14		15,0	30,0	51,5	
R-5.5-4S		4,3	7,4	18,5		R-22-16		17,0	30,0	51,5	
R-5.5-5		5,3	9,5	19,5		R-22-18		19,0	30,0	51,5	
R-5.5-6		6,4	12,0	25,5		R-22-20		21,0	30,0	51,5	
R-5.5-8		8,4	12,0	27,7		R-38-5S	38	5,3	15,5	38,2	50
R-5.5-10		10,5	15,0	27,7		R-38-5	26,66-42,42	5,3	22,0	42,5	
R-5.5-12		13,0	19,2	32,4		R-38-6S	2	6,4	15,5	38,2	
R-8-4	8	4,3	12,0	23,8	500	R-38-6		6,4	22,0	42,5	
R-8-4S	6,64-10,52	4,3	9,5	22,5		R-38-8S		8,4	15,5	38,2	
R-8-5	8	5,3	12,0	23,8		R-38-8		8,4	22,0	42,5	
R-8-5S		5,3	9,5	22,5		R-38-10S		10,5	15,5	38,2	
R-8-5L		5,3	15,0	29,6		R-38-10		10,5	22,0	42,5	
R-8-6		6,4	12,0	23,8		R-38-12		13,0	22,0	42,5	
R-8-6S		6,4	9,5	22,5		R-38-14		15,0	30,0	52,0	
R-8-6L		6,4	15,0	29,6		R-38-16		17,0	30,0	52,0	
R-8-8		8,4	15,0	29,6		R-38-18		19,0	30,0	52,0	
R-8-10		10,5	15,0	29,6	100	R-38-20		21,0	30,0	52,0	
R-8-12		13,0	20,0	33,5		R-60-6S	60	6,4	19,0	47,5	50
R-8-14		15,0	32,0	50,0		R-60-6	42,42-60,57	6,4	22,0	49,0	
R-8-16		17,0	32,0	50,0		R-60-8S	1/0	8,4	19,0	47,5	
R-8-18		19,0	32,0	50,0		R-60-8		8,4	22,0	49,0	
R-8-20		21,0	32,0	50,0		R-60-10S		10,5	19,0	47,5	
R-14-5S	14	5,3	10,0	28,5	100	R-60-10		10,5	22,0	49,0	
R-14-5	10,52-16,78	5,3	12,0	29,5		R-60-12		13,0	22,0	49,0	
R-14-6S	6	6,4	10,0	28,5		R-60-14		15,0	32,0	57,5	
R-14-6		6,4	12,0	29,5		R-60-16		17,0	32,0	57,5	
R-14-8S		8,4	12,0	29,5		R-60-18		19,0	32,0	57,5	
R-14-8		8,4	16,0	32,8		R-60-20		21,0	32,0	57,5	
R-14-10		10,5	16,0	32,8		R-60-22		23,0	32,0	57,5	
R-14-12		13,0	22,0	39,3		R-70-6	70	6,4	27,0	53,5	50
R-14-14		15,0	30,0	49,0		R-70-8	60,57-76,26	8,4	27,0	53,5	
R-14-16		17,0	30,0	49,0		R-70-10	2/0	10,5	27,0	53,5	
R-14-18		19,0	30,0	49,0		R-70-12		13,0	27,0	53,5	
R-14-20		21,0	30,0	49,0		R-70-14		15,0	27,0	53,5	
R-22-5	22	5,3	12,0	31,4	100	R-70-16		17,0	27,0	53,5	
R-22-6S	16,78-26,66	6,4	12,0	31,4		R-80-6	80	6,4	27,0	53,0	25
R-22-6	4	6,4	16,5	33,7		R-80-6L	76,28-96,30	6,4	32,0	63,0	
R-22-8S		8,4	12,0	31,4		R-80-8	3/0	8,4	27,0	53,0	
R-22-8		8,4	16,5	33,7		R-80-8L		8,4	32,0	63,0	



Terminales

Ref.	Sección cable mm² / AWG	Dimensiones mm.				Ref.	Sección cable mm² / AWG	Dimensiones mm.			
		Ød2	B	L				Ød2	B	L	
R-80-10		10,5	27,0	53,0	25	R-180-8	180	8,4	40,0	70,0	10
R-80-10L		10,5	32,0	63,0		R-180-8L	152,05-192,6	8,4	40,0	90,0	
R-80-12		13,0	27,0	53,0		R-180-10	350	10,5	40,0	70,0	
R-80-12L		13,0	32,0	63,0		R-180-10L	(MCM)	10,5	40,0	90,0	
R-80-14S		15,0	27,0	53,0		R-180-12		13,0	40,0	70,0	
R-80-14		15,0	32,0	63,0		R-180-12L		13,0	40,0	90,0	
R-80-16		17,0	32,0	63,0		R-180-14		15,0	40,0	70,0	
R-80-18		19,0	32,0	63,0		R-180-14L		15,0	40,0	90,0	
R-80-20		21,0	32,0	63,0		R-180-16S		17,0	40,0	70,0	
R-80-22		23,0	32,0	63,0		R-180-16		17,0	40,0	90,0	
R-100-6	100	6,4	28,5	55,5	25	R-180-18		19,0	40,0	90,0	
R-100-6L	96,3-117,2	6,4	32,0	69,0		R-180-20		21,0	40,0	90,0	
R-100-8	4/0	8,4	28,5	55,5		R-180-22		23,0	40,0	90,0	
R-100-8L		8,4	32,0	69,0		R-180-24		25,0	40,0	90,0	
R-100-10		10,5	28,5	55,5		R-180-27		28,0	40,0	90,0	
R-100-10L		10,5	32,0	69,0		R-200-8	200	8,4	44,0	79,0	10
R-100-12		13,0	28,5	55,5		R-200-8L	192,6-242,27	8,4	44,0	91,0	
R-100-12L		13,0	32,0	69,0		R-200-10	400	10,5	44,0	79,0	
R-100-14S		15,0	28,5	55,5		R-200-10L	(MCM)	10,5	44,0	91,0	
R-100-14		15,0	32,0	69,0		R-200-12		13,0	44,0	79,0	
R-100-16		17,0	32,0	69,0	R-200-12L		13,0	44,0	91,0		
R-100-18		19,0	32,0	69,0	R-200-14		15,0	44,0	79,0		
R-100-20		21,0	32,0	69,0	R-200-14L		15,0	44,0	91,0		
R-100-22		23,0	32,0	69,0	R-200-16S		17,0	44,0	79,0		
R-150-6	150	6,4	36,0	67,0	25	R-200-16		17,0	44,0	91,0	
R-150-6L	117,2-152,05	6,4	36,0	75,0		R-200-18S		19,0	44,0	79,0	
R-150-8	250-300	8,4	36,0	67,0		R-200-18		19,0	44,0	91,0	
R-150-8L	(MCM)	8,4	36,0	75,0		R-200-20		21,0	44,0	91,0	
R-150-10		10,5	36,0	67,0		R-200-22		23,0	44,0	91,0	
R-150-10L		10,5	36,0	75,0		R-200-24		25,0	44,0	91,0	
R-150-12		13,0	36,0	67,0		R-200-27		28,0	44,0	91,0	
R-150-12L		13,0	36,0	75,0		R-325-8	325	8,4	50,5	92,0	10
R-150-14S		15,0	36,0	67,0		R-325-8L	242,27-325,0	8,4	50,5	98,0	
R-150-14		15,0	36,0	75,0		R-325-10	500-600	10,5	50,5	92,0	
R-150-16S		17,0	36,0	67,0	R-325-10L	(MCM)	10,5	50,5	98,0		
R-150-16		17,0	36,0	75,0	R-325-12		13,0	50,5	92,0		
R-150-18		19,0	36,0	75,0	R-325-12L		13,0	50,5	98,0		
R-150-20		21,0	36,0	75,0	R-325-14		15,0	50,5	92,0		
R-150-22		23,0	36,0	75,0	R-325-14L		15,0	50,5	98,0		
R-150-24		25,0	36,0	75,0	R-325-16		17,0	50,5	92,0		
						R-325-16L		17,0	50,5	98,0	



Terminales

Ref.	Sección cable mm ² / AWG	Dimensiones mm.			
		Ød2	B	L	
R-325-18S	325	19,0	50,5	92,0	10
R-325-18	242,27-325,0	19,0	50,5	98,0	
R-325-20S	500-600	21,0	50,5	92,0	
R-325-20	(MCM)	21,0	50,5	98,0	
R-325-22		23,0	50,5	98,0	
R-325-24		25,0	50,5	98,0	
R-325-27		28,0	50,5	98,0	